




VULU STROLLER

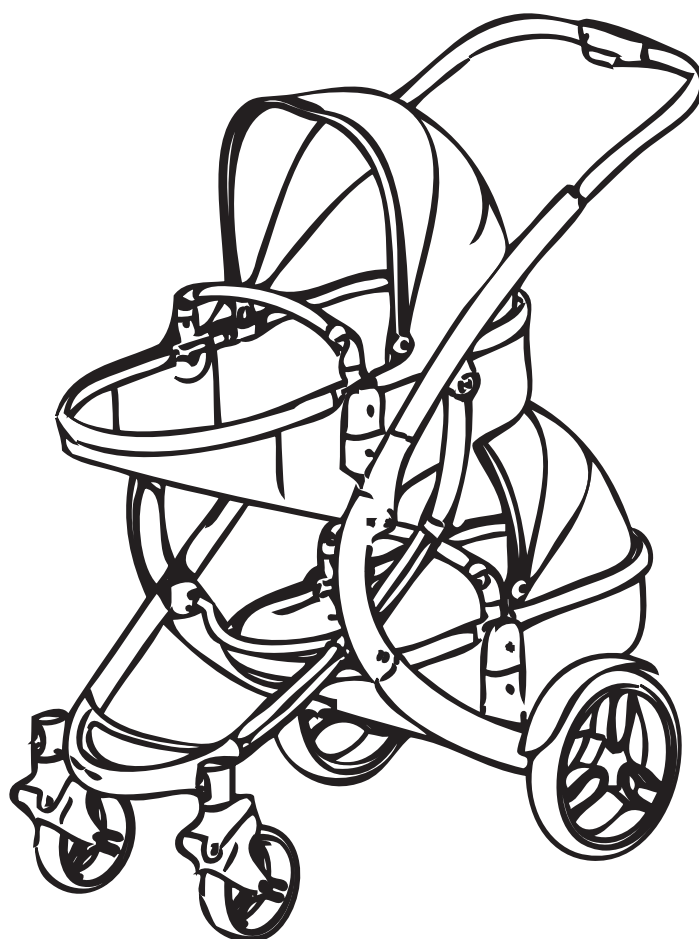

Instruction Manual

PLEASE KEEP INSTRUCTIONS FOR FUTURE REFERENCE

POSITIONS



vulu™





SAFETY GUIDELINES AND INSTRUCTIONS MUST ALWAYS BE FOLLOWED BEFORE MAKING USE OF THIS PRODUCT. PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

THIS PRODUCT COMPLIES WITH PRODUCT SAFETY STANDARD AS/NZS 2088:2009

WARNING

FOLLOW THE MANUFACTURER'S INSTRUCTIONS.

PUT ON ALL THE BRAKES WHENEVER YOU PARK THE STROLLER.

ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.

DO NOT LEAVE CHILDREN UNATTENDED.

SECURE THE CHILD IN THE HARNESS AT ALL TIMES.

DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS STROLLER.

DO NOT USE THIS SEAT WITH ANY OTHER MODELS OF STROLLER.

DO NOT USE THIS BASSINET ONCE THE CHILD CAN SIT UP UNAIDED.

USE THE SEAT IN THE UPRIGHT ONCE THIS OCCURS.

ALWAYS LOAD THE HEAVIER CHILD IN THE FRONT SEAT THEN PLACE THE LIGHTER CHILD IN THE REAR SEAT. ALWAYS UNLOAD THE REAR CHILD FIRST.

MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE STROLLER, OTHERWISE THEY MAY BE INJURED.

USE THE HARNESS AT ALL TIMES.

WHEN NOT IN USE DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAP AND/OR BUCKLE.

THE HARNESS CAN FORM LOOPS WHICH MAY BE A STRANGULATION HAZARD. NEVER LEAVE A HARNESS CONNECTED WHEN NOT FITTED TO A CHILD IN THE STROLLER.

TO AVOID SERIOUS INJURY ALWAYS USE THE HARNESS PROVIDED TO SECURE THE CHILD. (ADJUST THE STRAPS TO SUIT THE SIZE OF YOUR CHILDS BODY)

IT IS UNSAFE TO USE ACCESSORIES OTHER THAN THOSE SUPPLIED BY LOVE N CARE. CARE SHOULD BE TAKEN IF THE STROLLER IS TO BE USED ON STAIRS OR ESCALATORS. THIS STROLLER SHOULD NOT BE USED NEAR AN OPEN FIRE OR AN EXPOSED FLAME. CARE SHOULD BE TAKEN WHILST FOLDING AND UNFOLDING THE STROLLER TO PREVENT FINGERS BEING TRAPPED.

ENSURE YOUR CHILDS FINGERS, HANDS AND ALL OTHER BODY PARTS ARE CLEAR FROM ANY MOVING PARTS WHEN ADJUSTING THE SEAT OR HANDLE ON YOUR STROLLER.

WHEN USED IN THE UPPER POSITION MAX WEIGHT OF SEAT: 15KG

WHEN USED IN LOWER POSITION MAX WEIGHT OF SEAT : 9KG

MAXIMUM WEIGHT FOR BASKET: 3KGS

MAXIMUM WEIGHT FOR THE CUP HOLDER: 1KG

MAXIMUM WEIGHT CAPACITY IS: 28KG

*PICTURES USED IN THIS MANUAL ARE FOR ILLUSTRATIVE PURPOSES ONLY. THE ACTUAL STROLLER MAY VARY IN DISPLAY.

WHATS INSIDE



1.



2.



3.



4.



5.



6.



7.



8.



9.



10.

PARTS LIST:

MAKE SURE YOU HAVE THE FOLLOWING

1. 2X REAR WHEELS
2. 2X FRONT WHEELS
3. 2X REAR MUDGUARD
4. 2X REAR SEAT ADAPTER (SOLD SEPARATELY)
5. HANDLE BAR (MAIN SEAT)
6. CANOPY (MAIN SEAT)
7. CANOPY SECOND SEAT (SOLD SEPARATELY)
8. PRIMARY SEAT UNIT (LARGE)
9. SECOND SEAT UNIT (SMALL)(SOLD SEPARATELY)
10. HANDLE BAR (SECOND SEAT)(SOLD SEPARATELY)
11. MAIN FRAME
12. TETHER STRAP



11.



12.

HOW TO ASSEMBLE



UNFOLD THE FRAME



Unclip the latch from the frame.



Pull the frame away from the handle.



When pulling the stroller away from the handle make sure you keep your fingers away from the joints.



Pull the handle upwards. You should hear the handle bar locking into place the sound of a click.

HOW TO ASSEMBLE vulu™

ATTACHING THE FRONT WHEELS



Slide front wheel (2) into the front axel hole. The wheel should click into place.



Repeat on both sides.



To remove the front wheel: Press the button on the top of the front axel to release the front wheel.



To use the stroller in swivel mode the front lock on the axel should be upwards.



To lock the front wheels, press downwards on the front axel switch.

HOW TO ASSEMBLE



ATTACHING THE REAR WHEELS



Slide the mudguard (3) onto the rail on the rear axel.



Slide the Mudguard until it clips into position. You will hear it click.

To remove the mudguard just slide it the opposite direction.



Place the wheel into the hole located on the rear axel. Push the wheel inside until it is locked inside. Pull on it slightly to ensure that it is not loose.



To remove the wheel press on the middle release button and pull the wheel out

HOW TO ASSEMBLE



ATTACHING THE SECOND SEAT UNIT TO THE FRAME (SOLD SEPARATELY)



Place the seat unit (8) over the openings on the frame. It should click into place.



To remove the seat from the frame press the release buttons located on each side of the seat unit (8) then lift.

ATTACHING THE ADAPTERS FOR THE SECOND SEAT (SOLD SEPARATELY)



Slide the rear seat adapters (5) in the slots located next to the rear wheels. once they are locked in you will hear a click.

To remove the adapters press the button located on the frame then lift the adapter out.



Place the seat unit (8) over the openings on the frame. It should click into place.



HOW TO ASSEMBLE



ATTACHING THE BASKET



To assemble the basket place the 3 velcro straps through the 3 openings located on the front footrest.



Once they are through the openings attach them to the velcro slots on the bottom of the seat unit.

MAXIMUM WEIGHT LIMIT IS 3KG



Then you can strap the middle velcro strap on the assist tube. Then you can attach the rear velcro strap around the rear axel.

HOW TO ASSEMBLE



ATTACHING THE HOOD AND BUMPER BAR



Insert the ends of the Canopy (7) into the slots located on the sides of the seat unit (8)



Match the zipper ends together and then pull it upwards.



The assembled canopy should look like this.



To use the canopy pull it forwards.



To close the canopy push it inwards.



To Attach the bumper bar (6) slide it into the slots located on each side of the seat units (8)



To remove the bumper bar (6) press the buttons on the front of the bar then lift it out of the slots.

HOW TO ASSEMBLE



CONVERTING THE SEAT UNIT TO A BASSINET



Press the button located on the top of the stroller seat. Recline the seat unit until it lays flat.



Unclip the straps located on the bottom of the seat unit.



Strap the velcro around the bar on the side of the seat unit.



Curl the material on the base of the stroller around the bar on the bottom and zip the stroller.



The Assembled bassinet should look like this.

HOW TO ASSEMBLE



ADJUSTING THE POSITION



To adjust the angle of the seat press the button located at the top of the seat unit and push the seat in the direction you need.



The back rest can adjust to three sections.

ADJUSTING THE BACKREST



To adjust the backrest, lift the backrest adjustment key.




Then Pull the belt to the desired position.



HOW TO ASSEMBLE



ADJUSTING THE HANDLE

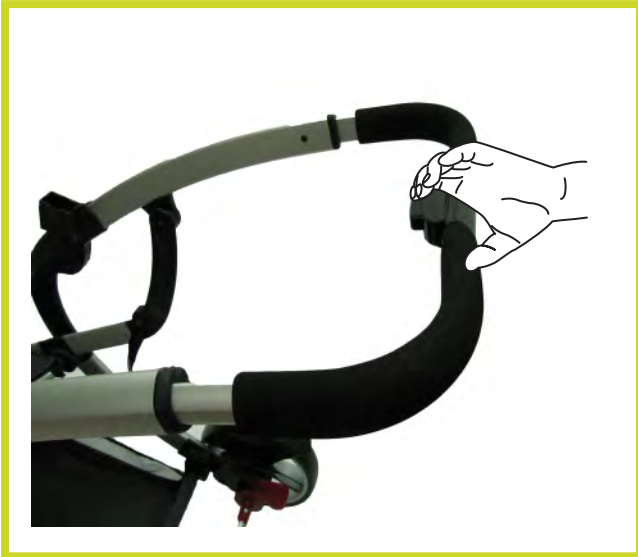


To adjust the handle press the middle handle button and pull to the desired position

USING THE BRAKES



To Apply the brakes push the red brake lever downwards.

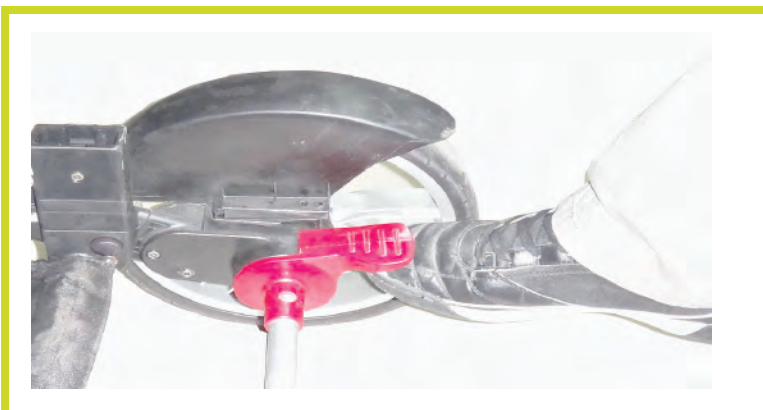

To remove the brakes kick the red brake lever upwards.

**WARNING: TO AVOID INJURY OR DEATH:
ALWAYS APPLY THE BRAKES WHENEVER
THE STROLLER IS STATIONARY.**

HOW TO ASSEMBLE



FOLD THE FRAME



Remove all seats and children before you commence unfolding. Press the release button on the side of the stroller (1) and (2) then push the button the handle (3) and push the handle inwards (4).



Once the handle has been loosened push the handle downwards.



Push the handle all the way down.



Then push the front wheels to the back.



Attach the latch to keep the stroller locked.

HOW TO ASSEMBLE



HOW TO USE THE 5-POINT HARNESS:



FIG. 1



FIG. 2



FIG. 3



FIG. 4



YOUR CHILD SHOULD BE SECURELY HARNESSSED AT ALL TIMES AND SHOULD NEVER BE LEFT UNATTENDED



THIS STROLLER HAS BEEN DESIGNED WITH A 5-POINT HARNESS FOR THE SAFETY OF YOUR CHILD.

CAREFULLY PLACE YOUR CHILD INTO THE SEAT AND BRING THE WAIST STRAPS AROUND THE CHILDS WAIST AND OVER THE CHILDS SHOULDERS.

PLACE THE CROTCH STRAP BETWEEN YOUR CHILDS LEGS.

TIGHTEN THE HARNESS TO BE SNUG AROUND THE CHILDS WAIST AND OVER ITS SHOULDERS. FIG.1

ATTACH EACH OF THE SHOULDER STRAPS TO THE WAIST STRAP BUCKLE WITH EACH END. FIG.2 REPEAT THIS FOR BOTH SHOULDER STRAPS.

ONCE EACH SHOULDER STRAP IS ATTACHED ON THE WAIST BUCKLE INSERT THE WAIST STRAP END TO THE CROTCH STRAP BUCKLE. FIG.3. REPEAT FOR BOTH SIDES.

THEY SHOULD SNAP IN. (PULL ON THEM TO TEST)

TO RELEASE THE HARNESS SQUEEZE THE CENTRE OF THE BUCKLES FOR BOTH WAIST STRAP ENDS. FIG. 4

⚠ WARNING

USE THIS HARNESS AT ALL TIMES

⚠ WARNING

WHEN NOT IN USE DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAP AND/OR BUCKLE



WARRANTY AGAINST DEFECTS

ALL LOVE N CARE/VULU PRODUCTS ARE GUARANTEED FOR TWELVE MONTHS FROM THE DATE OF PURCHASE.

OUR GOODS COME WITH GUARANTEES THAT CANNOT BE EXCLUDED UNDER THE AUSTRALIAN CONSUMER LAW. YOU ARE ENTITLED TO A REPLACEMENT OR REFUND FOR A MAJOR FAILURE AND FOR COMPENSATION FOR ANY OTHER REASONABLY FORSEEABLE LOSS OR DAMAGE. YOU ARE ALSO ENTITLED TO HAVE THE GOODS REPAIRED OR REPLACED IF THE GOODS FAIL TO BE OF ACCEPTABLE QUALITY AND THE FAILURE DOES NOT AMOUNT TO A MAJOR FAILURE.

THIS COVERS AGAINST FAULTS WHICH DEVELOP THROUGH FAULTY MATERIALS AND WORKMANSHIP. MISUSE, ACCIDENTAL DAMAGES, NORMAL WEAR AND TEAR OR NEGLECT ARE NOT COVERED.

IF A FAULT BECOMES APPARENT, PLEASE RETURN THE ITEM TO THE STORE OF PURCHASE WITH YOUR RECEIPT. YOU MUST INFORM THE STORE WHAT THE DEFECT IS. WE WILL THEN ARRANGE FOR ITS REPAIR OR IT WILL BE ASSESSED FOR REPLACEMENT AS EXPEDIENTLY AS POSSIBLE. THE BENEFITS OF THIS WARRANTY ARE IN ADDITION TO OTHER RIGHTS AND REMEDIES UNDER THE LAW IN RELATION TO THE GOODS AND SERVICES TO WHICH THIS WARRANTY RELATES.

IF YOU ARE UNABLE TO RETURN THE ITEM TO THE STORE OF PURCHASE, YOU CAN CONTACT LOVE N CARE ON FREECALL 1300732599. WE WILL THEN ORGANISE FOR EITHER SOMEBODY TO INSPECT THE ITEM OR ARRANGE FOR A COURIER TO PICK IT UP AND RETURN IT BACK TO YOU.

FOR MORE INFORMATION PLEASE CONTACT:



LOVE N CARE PTY LTD

EMAIL: info@lovencare.com.au

WEB: www.lovencare.com.au

PHONE: 1300 732 599

FAX: 02 9774 4633



CLEANING AND MAINTENANCE

ALL LOVE N CARE PRODUCTS HAVE ONE YEAR WARRANTY FROM THE DATE OF PURCHASE.

IT IS RECOMMENDED TO REGULARLY INSPECT AND MAINTAIN MOVEMENT OF LOCKING DEVICES AND SECURITY OF ESSENTIAL COMPONENTS.

REGULARLY CHECK ALL PARTS FOR WEAR AND TEAR. LUBRICATE IF TIGHT.

DO NOT USE SPRAY LUBRICANTS, SIMPLY WIPE CLEAN AFTER USE.

THE SEAT LINER CAN BE CLEANED BY SPONGING WITH WARM SOAPY WATER AND A MILD DETERGENT. A MILD DISINFECTANT MAY BE USED IF DESIRED.

STUBBORN MARKS MAY BE REMOVED WITH A NON ABRASIVE CREAM CLEANER.

NEVER CLEAN WITH ABRASIVE, AMMONIA BASED, BLEACH BASED OR SPIRIT TYPE CLEANERS.

IF THE WHEELS BECOME DAMAGED OR WORN DISCONTINUE USE AND REPLACE.

FABRIC CARE

- HAND WASH ONLY**
- DO NOT BLEACH**
- DO NOT TUMBLE DRY**
- DO NOT IRON**
- DO NOT WRING**
- DO NOT DRY CLEAN**





Contact Us

Head Office:
Love N Care Pty Ltd.
297-299 Canterbury Rd, Revesby
NSW 2212 Australia
Contact No: 02 9774 4655
Fax: 02 9774 4633
Email: info@lovencare.com.au
Website: www.lovencare.com.au

Brisbane
7-9 Eileen Street
Underwood QLD 4119 Australia
Contact No: 07 3290 4217
Fax: 07 3209 5019

Western Australia
5 Modal Crescent
Canning Vale WA 6155 Australia
Contact No: 08 9455 4972
Fax: 08 9455 4728

let's be friends!

 <http://www.facebook.com/lovencare1>

 http://twitter.com/love_ncare



100 % AUSTRALIAN OWNED SINCE 1984

BROUGHT TO YOU BY
love^hcare™
lovencare.com.au